

# STREET SWEEPER POWERED BY GLP MARK ANTOLI MODEL 1.200 L. GAS



## BARREDORAS ANTOLI S.L



### COMMITMENT TO A CLEANER ENVIRONMENT



**FEATURES AND WEIGHT.**

- Total length: 3.750 mm.
- Vehicle width: 1.300 mm.
- Vehicle height: 2.220 mm.
- Distance between axles: 1.450 mm.
- TARA: 2.740 kg.
- PMA: 4.500 kg.

**ENGINE:**

- Mark: G.M. PSI Model: 3.0 L .
- Cylinder Capacity: 2.966,59 c.c.
- Nº of cylinders: 4 in line.
- Power (SAEJ1995) to 3.000 r.p.m.: 62 cv. 46 Kw.
- Fuel: GLP.
- Refrigeration: For water with pump.
- Meets requirements on G.L.P. engines.

**TRANSMISSION:**

- Hydrostatic Transmission , two speeds to 4 wheels, with independent engine each wheel.

**FRAME:**

- Made in rectangular tube steel ST-52.

**SUSPENSION:**

- Front Axle: Shock absorber and hydraulic suspension.
- Back Axle: Shock absorber and hydraulic suspension.

**TIRES:**

- Numbers: 4.
- Features: 6.50 - 10 10 P.R.

**STEERING:**

- Assisted and powered hydraulic pump to 4 wheels.
- Turning between walls: 3,5 m.
- Turning circle inside: 1m.

**BRAKE SYSTEM:**

- Brake: Hydrostatic and hydraulic circuit with disc brake to 4 wheels with servofreno to front wheels.
- Hand Brake: By means of electrical switch with disc brake to back wheels.
- Emergency Brake: That of parking and hydrostatic.

**ELECTRIC SYSTEM:**

- Battery: 1 to 12V, 88Ah.
- Illumination: Coforms to highway regulations.
- Electric system: moisture, friction isolated by Airflo tube, and protected by relays and fuses.

**PAINTING:**

- Cleaning by immersion, one layer of expositofosfatante, one layer of first high build, two layers of acrylic paint finish with polyurethane hot and dry.

**CABIN AND CONTROLS:**

- Comfortable cabin, with acoustic and thermal isolation, and suspension.
- 2 squares, with totally adjustable driver's seat and suspension.
- Equip climatizador (Air conditioning and Heating).
- Wide surface window screens with a perfect field of vision of the zone of work.
- 2 maneuverable rear-view mirrors and 2 mirrors of work for the brushes.
- Ergonomic control panel for rapid easy execution.
- Audio equipment (broadcast-CD).

**TECHNICAL FEATURES:**


- Sweep system : Aspiration, by means a high yield turbine .
- Floating mouthpiece aspiration, with flap hydraulic for residues of great volume, and suction pipe of 200 mm. in diameter.
- Tube of auxiliary aspiration of 125 mm in diameter and 4 m in length.
- 2 front extendible brushes and adjustable speed.
- Maximum width for sweep: 2.200 mm.
- Ergonomic joystick for the sweep functions, form in the cabin.
- Hopper of residues in Stainless Steel, with a capacity of 1.5 m3, with turn on tilt hydraulic.
- Tipping height 1.300 mm.
- Water tank with a capacity of 300 litres.
- Water diffusers antipowder in the brushes, suction pipe and mouthpiece of aspiration.
- High pressure cleaning system with pistol.
- Equipped with centralized automatic greasing system with programmer.

**OPTIONS:**

- The third front extendible brush.
- Monitoring equipment and camera for rear vision.

**IT FULFILLS SAFETY NORMS 89/392 CEE.  
(Safety in machines)**

This catalogue is subject to modifications without previous notice.

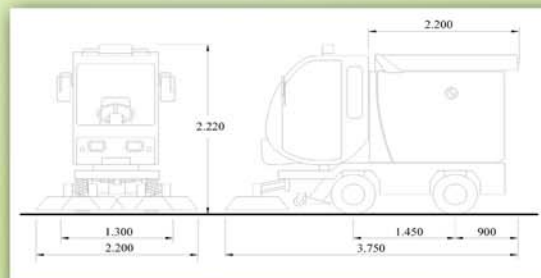

**BARREDORAS ANTOLI S.L**  
**POL. IND. DEHESA BOYAL, PARC. 5-8**  
**APARTADO DE CORREOS Nº.49.**  
**14.400 POZOBLANCO (CÓRDOBA). ESPAÑA.**  
**TLF. 34 957 770 439 FAX. 34 957 770 491.**  
**E-mail: barredorasantoli@telefonica.net**  
**Web: www.barredorasantoli.com**

